



ABV


Series GTC

Subsea Service

Through Conduit Gate Valve

CHARACTERISTICS

- Size Range:
 - 1.13/16" – 13.5/8"
 - 2" – 24"
- Pressure Classes:
 - API 5000-10000-15000
 - ASME 900-1500-2500-4500
- Connections:
 - Flanged
 - Compact Flange Norsok
 - HUB or Butt Welding
- Material Specification:
 - PSL 1-2-3-3G and 4
- Design according to:
 - API 6A-API 6D-API 17D
 - API 6A Appendix F, PR2
- Operation:
 - (The operators will be manufactured by ABV and are integral part of the ABV package valve + actuator)
 - Hydraulic Actuators Double Acting
 - Hydraulic Actuators Single Acting
 - R.O.V. receptacle or Subsea gear operator for manual operation
- Applications:
 - Isolation of Manifolds
 - Hot Tap connections
 - SSIV Isolation

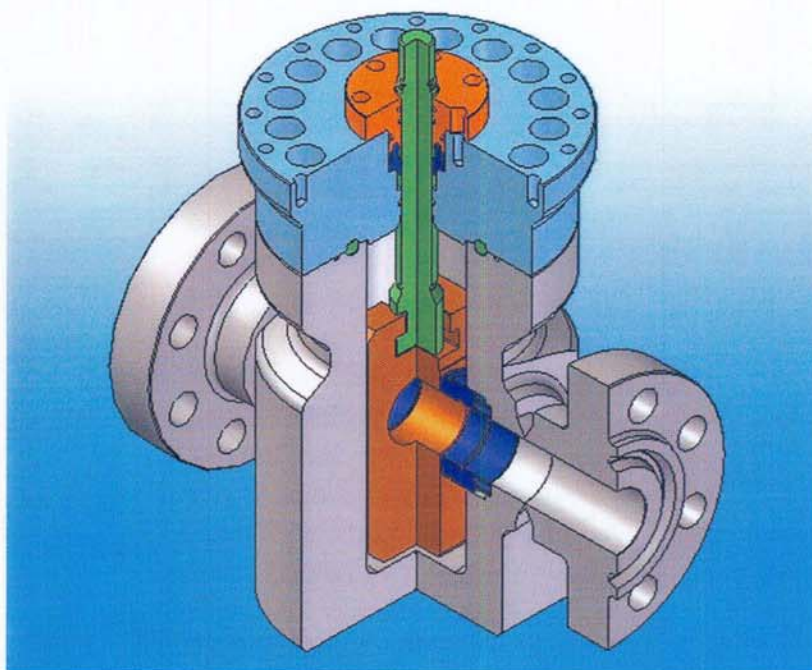

Representative for Benelux Countries
Energy Management Systems BV
Phoenixstraat 37 1801 GA Alkmaar
Telf. +31(0) 72 5401147 Fax. +31 (0) 72 5400992
web : www.emsvalvesinstruments.com
email: info@emsvalvesinstruments.com

Design and dimensions may be subject to change without notice, except the dimensions established by international standard specifications.